

SIMATIC Field PG M5 - Design of the device

View with closed display




- ① Status displays
- ② Display latch
- ③ Device handle

Front view with display open



- ① Display latch
- ② Display
- ③ Stereo speakers
- ④ On/off button (power)
- ⑤ Keyboard
- ⑥ Touchpad
- ⑦ Mouse buttons

View from rear

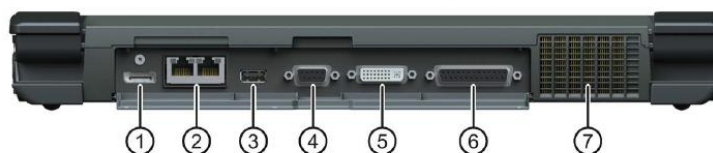

- ① Display port (DPP)
- ② 2 x Ethernet
- ③ USB 3.0 Type A
- ④ MPI/DP
- ⑤ DVI-I
- ⑥ RS232/TTY (TTY functionality, depending on the HW configuration variant)
- ⑦ Ventilation air outlet

View of left side



- ① Opening for Kensington lock
- ② Ventilation air inlet
- ③ Socket for connection to the power supply: DC IN 19 V
- ④ Audio jack: UAJ connection for audio devices
- ⑤ USB 3.0 Type C
- ⑥ Multimedia Card Reader for:
 - SD card (including SD UHS-II)
 - MMC
 - SMC (SIMATIC MC)
- ⑦ ExpressCard™ Reader for:
 - ExpressCard™ Type 34

View of right side



- ① Smart Card Reader for:
 - Smart card according to ISO/IEC 7816 Smart Card Interface
- ② Optical drive
- ③ Card reader for:
 - SIMATIC Micro Memory Card
- ④ Exchangeable hard disk unit
- ⑤ Card reader for:
 - SIMATIC Memory Card
- ⑥ 2 x USB 3.0 ports, with cover
Top port: USB 3.0 Type A
Bottom port: USB 3.0 Type A with charging function