Dimension drawings

3RV1 circuit-breaker, size S00

3RV10 11, 3RV16

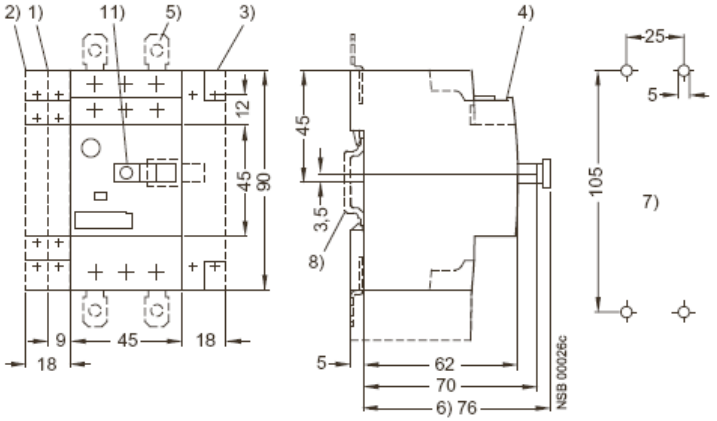

3RV1 circuit-breaker, size S0

3RV10 21, 3RV13 21, 3RV14 21

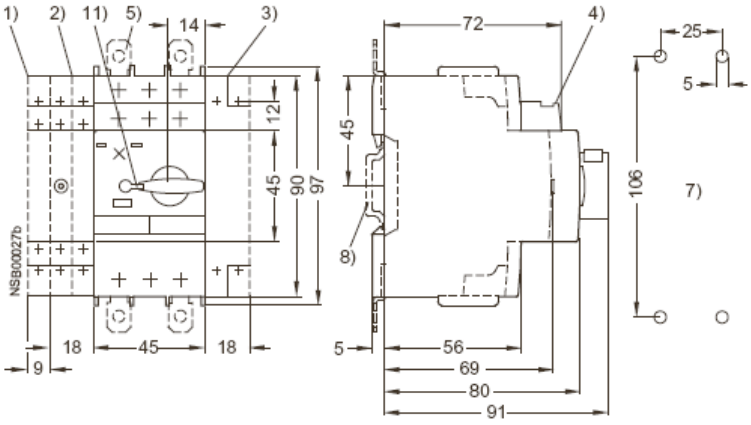

3RV1 circuit-breaker, size S2

3RV10 31, 3RV13 31, 3RV14 31

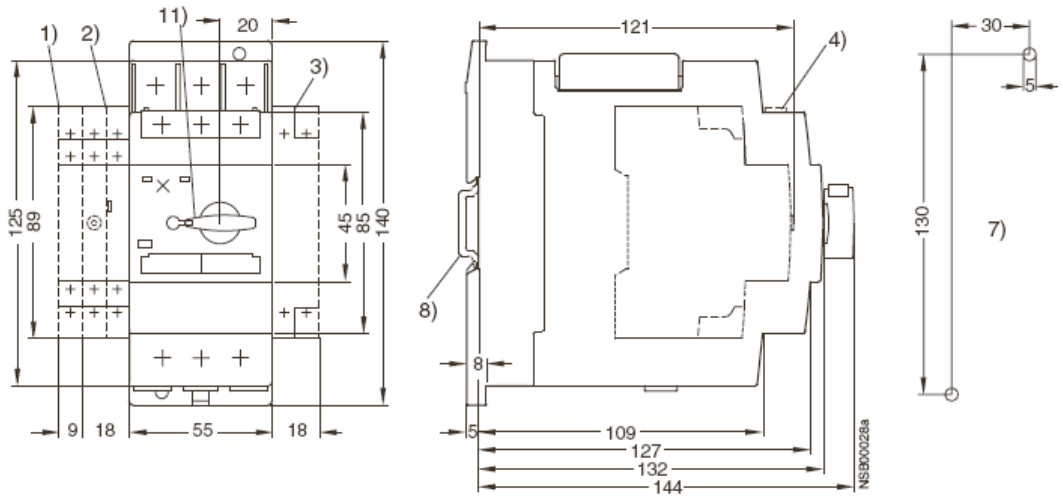

3RV1 circuit-breaker, size S3

3RV10 4, 3RV13 4

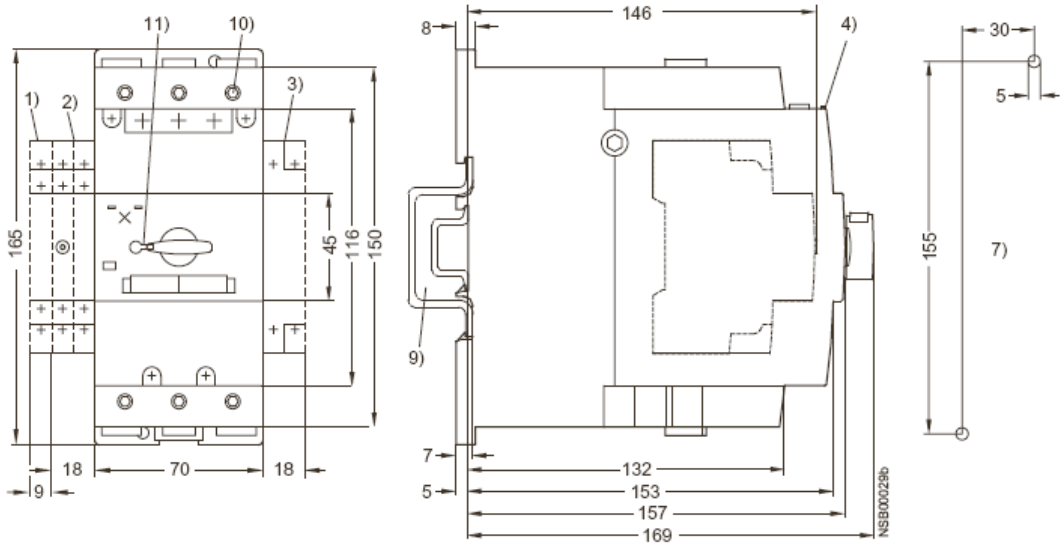

1) Lateral auxiliary switch, 2-pole.
2) Alarm switch (S0-S3) or lateral auxiliary switch, 4-pole (S00-S3).
3) Auxiliary release
4) Transverse auxiliary switch
5) Push-in lugs for screw fixing
6) For undervoltage release with leading auxiliary switch only.
7) Drilling diagram
8) 35 mm standard rail acc. to EN 50022
9) Mounting onto 35 mm standard rail, 15 mm high, acc. to EN 50022 or 75 mm standard rail acc. to EN 50023
10) Hexagon socket screw 4 mm
11) Lockable in neutral position With shackle diameter 3.5 mm to 4.5 mm.